




GR8 Guard™ (GG): Installation Guidelines

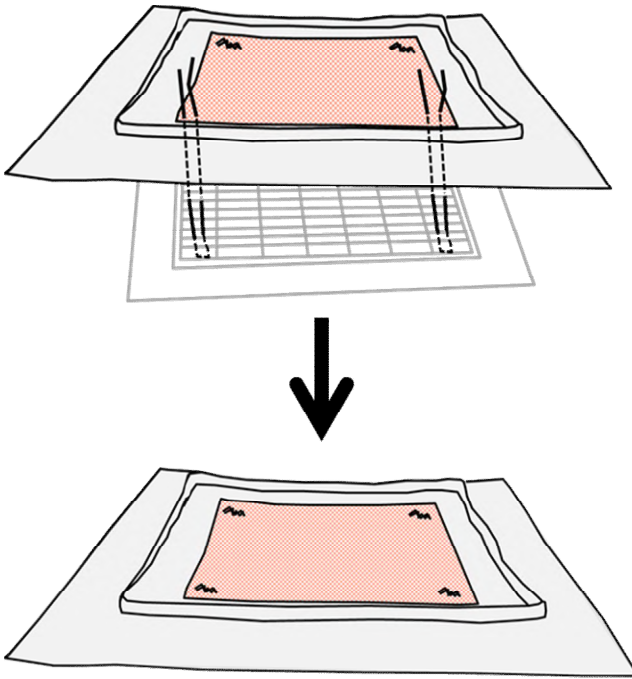

CA Route 13 May 2016

GG works well if periodic run-overs, but does not survive long in constant stop-and-start traffic. Sweep clean after every storm or as necessary.

Select:

- **Select correct size.**
 - GG 12x12: grates less than 12"x12"
 - GG 20x20: grates less than 20"x20"
 - GG 28x28: grates less than 28"x28"
 - GG 36x24: grates less than 36"x24"
 - GG 36x36: grates less than 36"x36"
 - GG 42x28: grates less than 42"x28"
 - GG 48x24: grates less than 48"x24"
 - GG 48x36: grates less than 48"x36"
 - GG 48x48: grates less than 48"x48"Custom sizes are available

Position:

- Do NOT remove grate. Lay GG on top of grate.

Attach:

- Attach to grate in 4 corners, as near to grate corners as possible.
- Use common 16 gauge rebar tie-wire. As close as possible to corners of orange mesh, poke wire thru top, run wire down thru GG, under cross-bars of grate and back up thru GG orange mesh. Tie-off on top, twist ties several times. Snip-off excess.

Clean:

- Accumulation of leaves, debris and sediment can cause backups! Clean after every storm or as necessary.

Protect:

- In stop and go traffic areas where exposed to constant tire abuse, it is useful to place traffic cones or delineators on or near GG to discourage run-overs.